

Project Name:	Type:
Product Code:	Date:


## BRASS ADJUSTABLE CYLINDER



### BRASS ADJUSTABLE CYLINDER

The Vanilla Brass Adjustable Cylinder features a clean machined body which showcases the quality of its craftsmanship. The cylinder provides high visual comfort thanks to the 1 inch regress of the LED-engine. This helps to control glare and maintain a quiet elegance in any space or setting it's installed. The fixture has a brass swivel stem for optimal adjustability, this allows the fixture to be tilt able 90° and Rotated 360°.

The Vanilla Brass Adjustable Cylinder is provided with a 2.185 inch stem standard, but custom stem lengths are available upon request. The fixture is mounted to a minimal backplate 2.5 inches in diameter. Optics are field swappable between the spot (25°) and flood (60°) optics provided. It also features a clean beam edge suitable for lighting high quality residential and hospitality spaces.

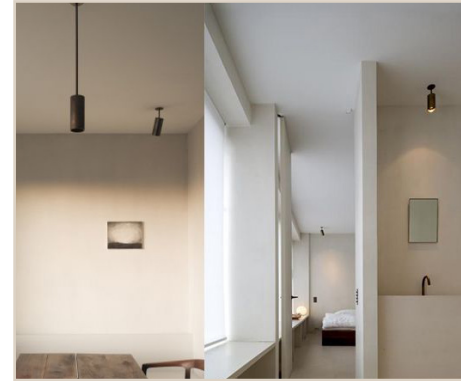

## PERFORMANCE

	LED
CCT:	2700K / 3000K
CRI:	90 CRI
WATTAGE:	11 WATTS
LUMENS:	660 LM's (2700K) / 680 LM's (3000K)
LED LIFE:	50,000 hours
POWER:	350 mA
SDCM:	2 STEP


CCT: 2700K 3000K



OPTICS / BEAM SPREAD:


60°

25°



Optics are field swappable between the spot (25°) and flood (60°) Optics provided.

## KEY DIMENSIONS

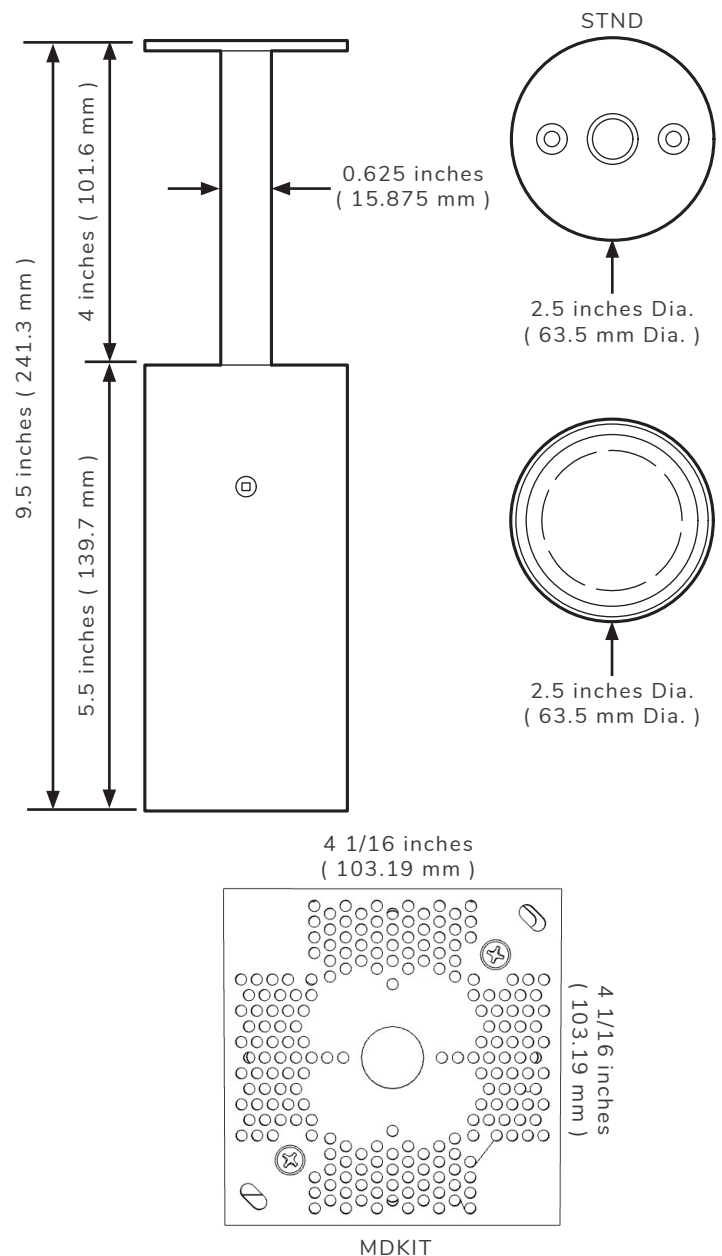


## DRIVER PERFORMANCE


### ONE FIXTURE PER DRIVER ONLY

<b>UL CLASS:</b>	CLASS 2 OUTPUT
<b>INPUT VOLTAGE:</b>	120/220 - 240/277 Vac (50/60 Hz)
<b>OUTPUT CURRENT:</b>	350mA
<b>OUTPUT POWER:</b>	15 WATTS
<b>DIMMING PROTOCOL:</b>	ELV DIMMING or 0-10V
<b>DIMMING RANGE:</b>	1 - 100%

## DRIVER DIMENSIONS

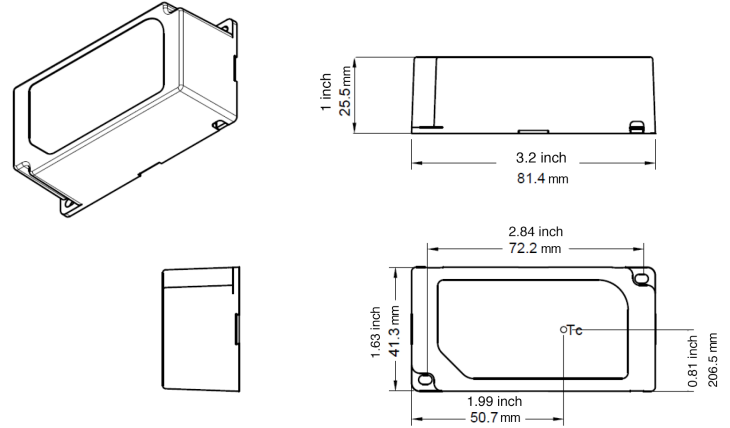

## FINISHES



**POLISHED BRASS**



**ANTIQUED BRASS**



**BLACKENED BRASS**

## ORDER INFORMATION

### Order Code

MAKE	PROFILE	FINISHES	STEM LENGTH	TILT ANGLE	OPTICS	COLOR TEMP	INSTALLATION	DIMMING	DRIVER
VAN	BRMP	<b>PB</b> Polished Brass	<b>4</b> 4" (Standard)	<b>25</b> 25° Tilt	<b>S</b> 25°	<b>27K</b> 2700K	<b>STND</b> Non-Drywall***	<b>0-10V</b>	<b>U</b> ELV/0-10V
		<b>AB</b> Antiqued Brass	<b>XX</b> Custom Length*	<b>90</b> 90° Tilt	<b>F</b> 60°	<b>30K</b> 3000K	<b>MDKIT</b> Drywall****	<b>PHASE</b>	
		<b>BB</b> Blackened Brass							

\* Other stem lengths available upon request, 36 inch maximum stem length

\*\* Remote driver up to 30ft from install

\*\*\* For non-drywall mounting use STND, installation will have countersunk screws in mounting plate

\*\*\*\* Drywall installation requires Mudkit

## DRIVER COMPATIBILITY LIST

BRAND	MODEL	DIMMING % (MIN)	DIMMING % (MAX)
LUTRON	DIVA-DV-600P	1%	96.7%
LUTRON	DIVA CL-DVCL-153P	1%	95.5%
LUTRON	SKYLARK-SLV-600P	1%	96.0%
LUTRON	MAESTRO-MACL-153M	1%	92.2%
LUTRON	CASETA-PD-5NE	1%	76.0%
LUTRON	RRD-6CL	1%	92.6%
LEVITON	6674-P	1%	96.8%
LEVITON	RNL06	1%	
LUTRON	NTLV-600-277	1%	100.0%
LUTRON	NTLV-1000-277	1%	100.0%



Imported by the Lighting Group Network (LGN).

<https://www.lightinggroupnetwork.com>

Lighting Group Network is the premier importer of European lighting products. We specialize in tailoring products from around the world to make them compliant with every North American market. From component sourcing, to full listings, Lighting Group Network has the engineering background to bring any manufacturer or product to full local compliance.

FOR DRY AND DAMP  
LOCATION USE.

FOR INTERIOR USE ONLY.