

|               |       |
|---------------|-------|
| Project Name: | Type: |
| Product Code: | Date: |



### CUBE SCONCE

The Vanilla Cube Sconce features clean simple lines which make it a great piece for any minimalist interior space. It provides a soft up and down light to highlight any feature wall or can be a feature itself with the quality of light it produces. The fixture comes standard in White and Black powder coat finish and has a soft diffuser made from acrylic. The fixture's up and down light allows it to be placed anywhere to suit the space and desired design aesthetic.




### PERFORMANCE

|           |                                |       |
|-----------|--------------------------------|-------|
|           | LED                            |       |
| CCT:      | 2700K / 3000K                  |       |
| CRI:      | 90+ CRI                        |       |
| WATTAGE:  | 20 WATTS                       |       |
| LUMENS:   | 600 UP/ 600 DOWN LMs Delivered |       |
| LED LIFE: | 50,000 hours                   |       |
| POWER:    | 500 mA / 36v                   |       |
| SDCM:     | 2 STEP                         |       |
| CCT:      | 2700K                          | 3000K |



OPTICS / BEAM SPREAD: 120° BEAM SPREAD




BI-DIRECTIONAL FLOOD

### FIXTURE DESCRIPTION

|           |           |
|-----------|-----------|
| WEIGHT:   | 1.76 LBS  |
| MATERIAL: | ALUMINIUM |
| DIFFUSER: | ACRYLIC   |

### KEY DIMENSIONS

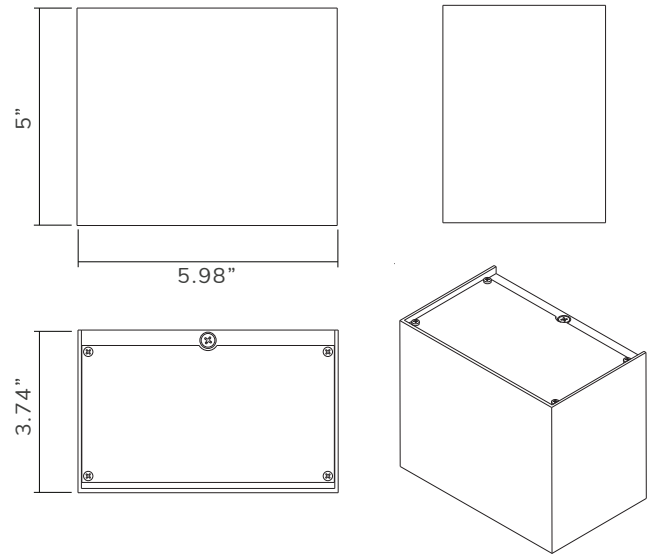

### DRIVER SPECIFICATIONS


|                   |                        |
|-------------------|------------------------|
| DIMMING PROTOCOL: | TRIAC DIMMABLE         |
| LED CLASS:        | 2 OUTPUT               |
| AC INPUT:         | 120v - 277v / 50/60 Hz |
| MAX OUTPUT:       | 20 WATTS               |

**ORDER INFORMATION**

| Order Code |      |      |       |        |       |         |          |          |      |        |                  |
|------------|------|------|-------|--------|-------|---------|----------|----------|------|--------|------------------|
| MAKE       | BODY | TEMP |       | FINISH |       | VOLTAGE |          | MOUNTING |      | DRIVER |                  |
| VAN        | CBE  | 27K  | 2700K | BK     | BLACK | U       | 120-277v | W        | WALL | E      | ELV (INTEGRATED) |
|            |      | 30K  | 3000K | WH     | WHITE |         |          |          |      | R      | ELV (REMOTE)     |

**DRIVER DIAGRAM**

**INTEGRATED DRIVER**

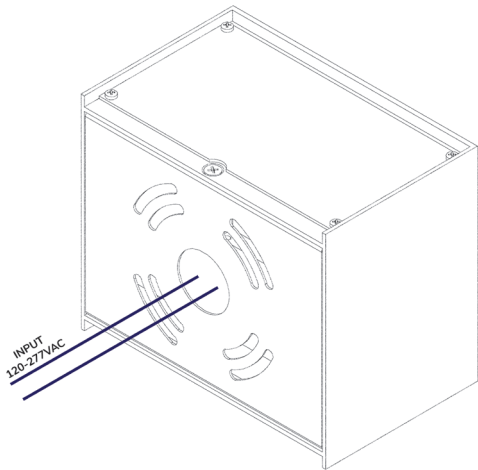

**REMOTE DRIVER**

