

INGROUND UPLIGHT SMALL

Project Name:	Type:
Product Code:	Date:









Inground Uplight Small

The perfect solution for marking out paths, walkways, and entrances, and illumination of small architectural or landscape elements.

Featuring a shallow recess depth for a hassle-free installation, this series is available in every desired colored or white shade. Fitted with stainless steel frame and remote PSU, these versatile uplights also come in a flush-mount full-glass version for an even more elegant and discreet layout. A durable drive-over version is suitable for installation in vehicular areas.



PERFORMANCE


	STATIC WHITE			DYNAMIC WHITE		RGBW
LUMEN PERF:	229 LMS			24 LMS		14 LMS
POWER:	700 mA			150 mA		150 mA
WATTAGE:	2.5W			1.5W		1.5W
CCT:	2700K	3000K	4000K	3000K	6500K	
						

ALL


LIGHT:	LED Module	CONTROL SYSTEM:	DMX-RDM, ELV, ON-OFF, 0-10V
SOURCE:	LED	RANGE:	1-100% Dimming Range
SDCM:	2 STEP	MAX OUTPUT:	229 LM / 92 Lm/W
CRI:	80 CRI, 90 CRI Options Available upon request	OPERATING TEMP:	-40°C to 40°C / (-40°F to 104°F)

DIMENSIONS

TRIMLESS

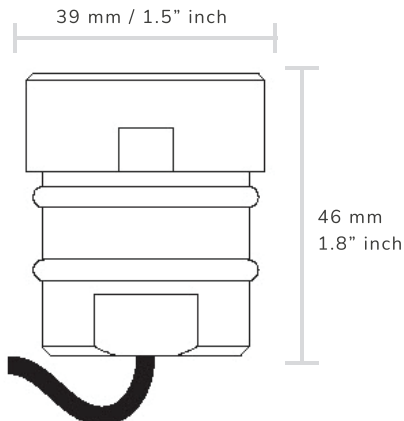

TRIMMED

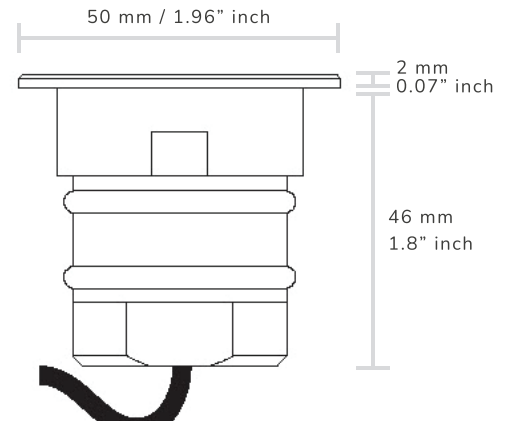

ORDER INFORMATION

Order Code

VAN	PROFILE	COLOR TEMP	OPTICS	TRIM	POWER	OPTIONS
VAN	IN5317 Fixed	27K 2700K	NA 12°	TL Trimless	ELV	H HEXCELL LOUVER
		30K 3000K	ME 23°	TR Trimmed	0-10V	
		40K 4000K	WI 43°			
		RGBW3 3000K	GO 120°		DMX DMX-RDM* (DMX Ready)	
		RGBW4 4000K				
		DW 3000-6500K				

*250 mA driver required for Static White options.

** Other dimming options available upon request


HOUSING DIMENSIONS

TRIMLESS		TRIMMED	
16 mm / 0.6 Inches		2 mm / 0.1 Inches	
60 mm / 2.4 Inches		16 mm / 0.6 Inches	
76 mm / 3 Inches		60 mm / 2.4 Inches	
25 mm / 1 Inches		78 mm / 3.1 Inches	
		25 mm / 1 Inches	
140 mm / 5.5 Inches		50 mm / 2 Inches	
		40 mm / 1.6 Inches	
		5 mm / 0.2 Inches	
		140 mm / 5.5 Inches	
		128 mm / 5 Inches	
		100 mm / 3.9 Inches	

WIRING DIAGRAM


STATIC WHITE

Constant Current - Wiring in Series
 Maximum 10 Fixture
 Distance between PSU and the last Fixture:
 164FT AWG#12

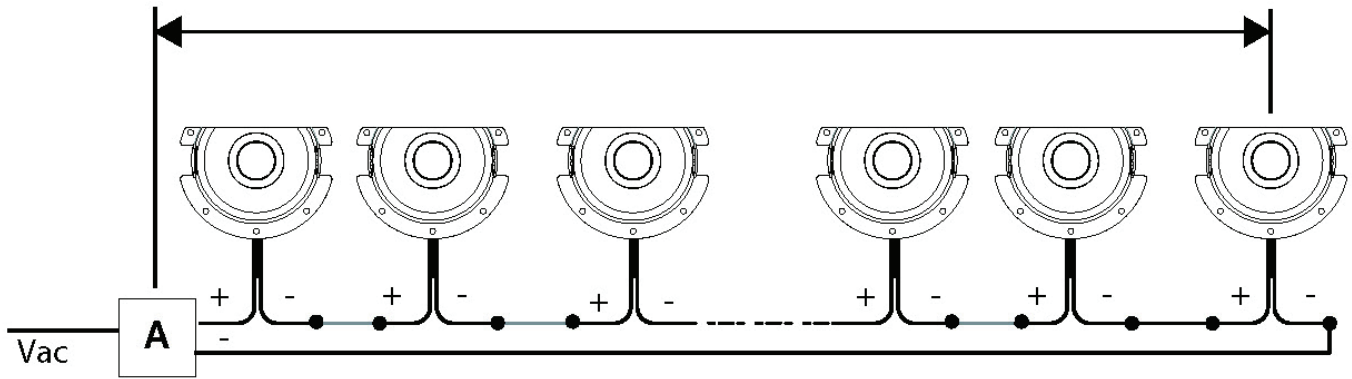

DYNAMIC WHITE + RGBW

Constant Voltage - Wiring in Parallel
 Maximum 4 Fixtures
 Distance between PSU and the last fixture:
 328FT AWG#12

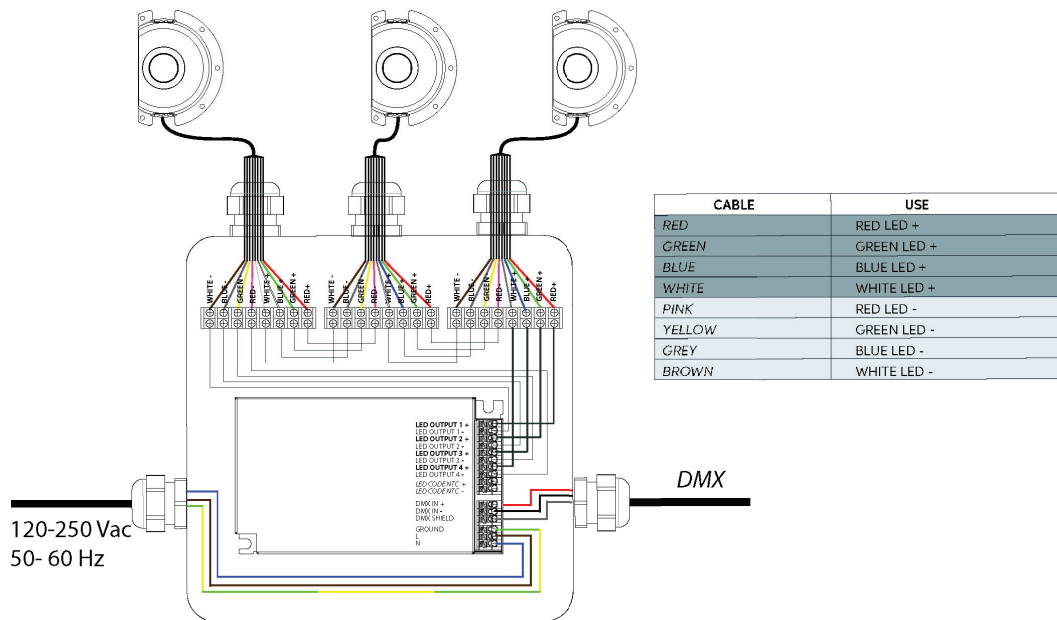

Imported by the Lighting Group Network (LGN).

<https://www.lightinggroupnetwork.com>

Lighting Group Network is the premier importer of European lighting products. We specialize in tailoring products from around the world to make them compliant with every North American market. From component sourcing, to full listings, Lighting Group Network has the engineering background to bring any manufacturer or product to full local compliance.

IP68 NOT SUITABLE FOR UNDERWATER USE

2 YEAR WARRANTY.