



Project Name:	Type:
Product Code:	Date:



SPOT WALL LARGE

THE VANILLA SPOT WALL is an extremely compact LED luminaire capable of enhancing outdoor ambiances with discretion and elegance through the creation of refined accent lighting effects. Its external power supply unit allows a comfortable installation even in the smallest spaces, as well as the simultaneous management of multiple units. It is the ideal solution for a bright illumination of essential landscape or architectural details in delicate pastel tones or intense white shades. Extremely compact LED luminaire for a bright illumination of essential landscape or architectural details (IP 67).



PERFORMANCE

	STATIC WHITE			DYNAMIC WHITE		RGBW
LUMEN PERF:	1499 LMS	251 LMS (Ultra Spot 6°)		413 LMS		242 LMS
POWER:	350 mA	1000 mA (US)		24v		24v
WATTAGE:	12.5 W	3 W (US)		9 W		9 W
CCT:	2700K	3000K	4000K	3000K — 6500K		

ALL


LIGHT:	LED Module	CONTROL SYSTEM:	DMX-RDM, ELV, ON-OFF, 0-10V
SOURCE:	LED	OPERATING TEMP:	-40°C to 50°C / (-40°F to 122°F)
SDCM:	2 STEP	MAX OUTPUT:	1499 lm / 120 lm/W
CRI:	80 CRI, 90 CRI Optional	RATING	IP 67 WET LOCATION

DIMENSIONS

SPOT STANDARD	SPOT SPIKE

DIMENSIONS

SPOT CUSTOM ROD

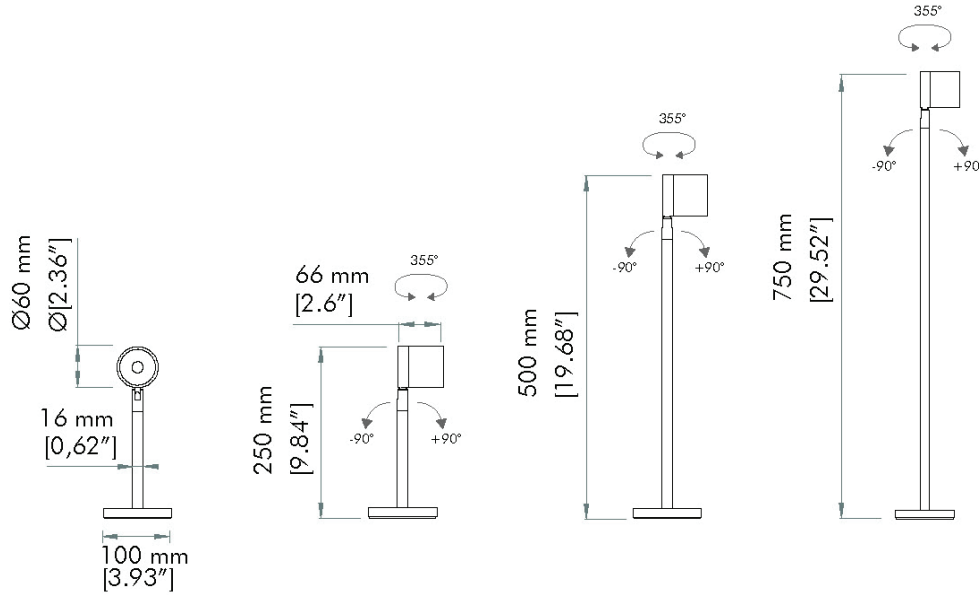

ORDER INFORMATION

Order Code

VAN	PROFILE	COLOR TEMP		OPTICS		FINISH		DIMMING	ACCESORY	
VAN	SP5312	27K	2700K	US	6° 3W 1000mA	BO	Black RAL	ELV	A Anti-Saline Treatment	
		30K	3000K	NA	18°	AO	Anthracite RAL	0-10V	S Spike for Ground Fixing	
		40K	4000K	ME	25°	GO	Grey RAL	others*	H Hexcell Louver	
				WI	35°	WO	White RAL		R Custom ROD length	
				EW	50°	OO	Olive RAL			
		DW	3000-6500K	NA	13°	DMX - Requires a 24vdc Driver				
		RGBW3	3000K	ME	23°					
		RGBW4	4000K	WI	35°					
				EW	56°					

* On Request

FINISHING



BLACK RAL



ANTHRACITE RAL



GREY RAL



WHITE RAL




OLIVE RAL

WIRING DIAGRAM


STATIC WHITE

Constant Current - Wiring in Series
Maximum 1 Fixtures
Distance between PSU and the last fixture:
70FT AWG#12

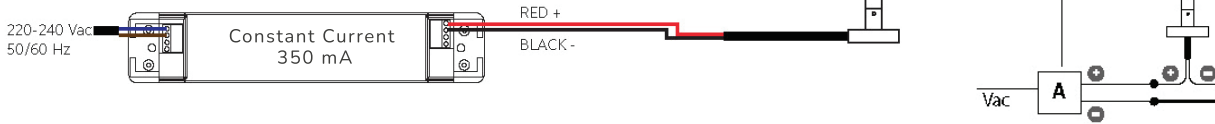

STATIC WHITE (ULTRA SPOT)

Constant Current - Wiring in Series
Maximum 15 Fixtures
Distance between PSU and the last fixture:
70FT AWG#12

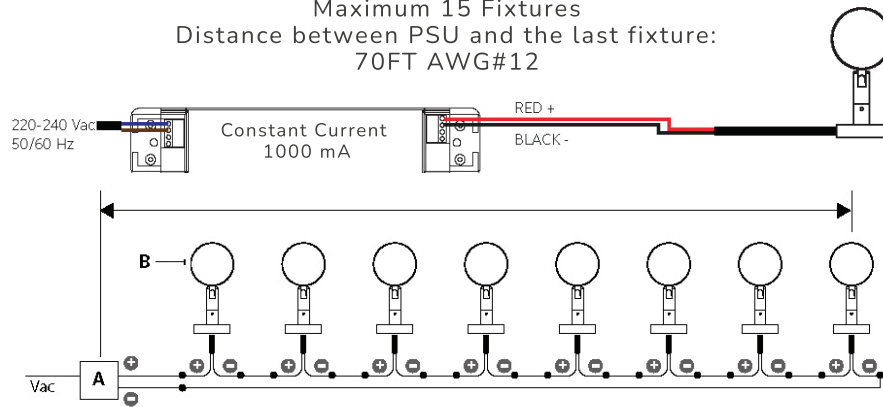

RGBW / DYNAMIC WHITE

Constant Voltage - Wiring in Parallel
Maximum 10 Fixtures
Distance between PSU and the last fixture:
100FT AWG#12

