

Project Name:	Type:
Product Code:	Date:

## LINEAR GRAZER/WALL WASHER



### Linear Grazer / Wallwasher

This high efficacy linear LED fixture has a wide range of optical options and is outdoor rated IP67. It features a very compact body that is suitable for installation conditions with limited space. It's ideal for facade lighting for historical and modern buildings. With its end to end installation capabilities, it can provide a uniform lighting effect along any facade condition with constant pixel pitch. The fixture is provided with a built-in microlouver with half sanded glass standard for optimal glare control. Fixture features an extruded aluminum body and tempered glass construction. Integrated thermal management system with passive cooling.




### PERFORMANCE

SOURCE:	LED
SDCM:	2 STEP
OPERATING TEMP:	LED
POWER:	24 -48 VDC
RATING:	IP 67
CCT:	2 STEP
CRI:	80 CRI / 90 CRI available on request
CCT:	2700K    3000K    4000K



	1	2	3	4
LENGTH:	12 INCH	24 INCH	37 INCH	49 INCH
WATTAGE:	14.4 W	28.8 W	43.2 W	57.6 W
PERF	91 LM/W	91 LM/W	91 LM/W	91 LM/W
LUMENS	1313 LMS	2626 LMS	3939 LMS	5252 LMS

### KEY DIMENSIONS

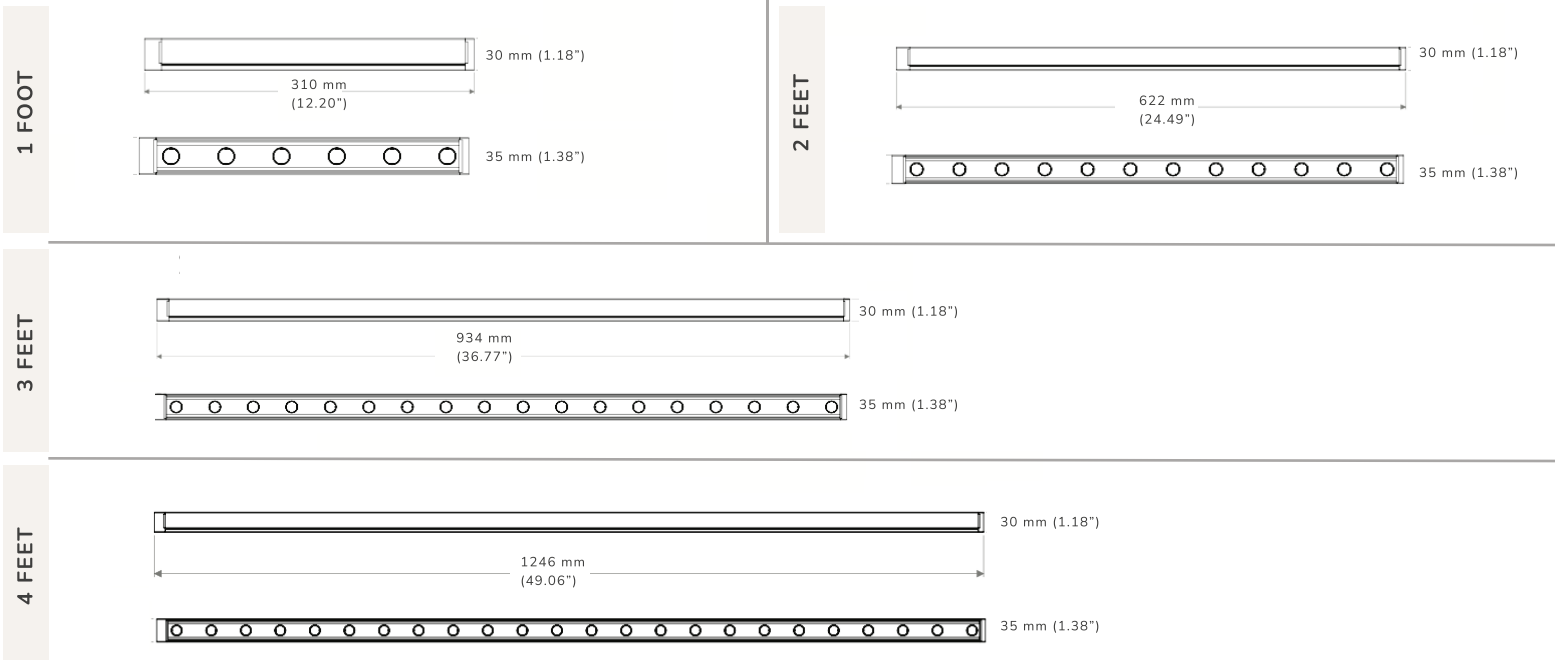


## MOUNTING OPTIONS

FP FIXED PLATE



AP ADJUSTABLE PLATE



## OPTIONS

VS VISOR



## ORDER INFORMATION

### Order Code

VAN	PROFILE	CRI	COLOR TEMP	OPTICS	LOUVER	MOUNTING	DIMMING	OPTIONS
VAN	LINE1 -LN5252 (12.2")	CRI80	27 2700K	NA - 20°	L MICROLOUVER WITH HALF SANDED GLASS	FP FIXED	E4 ELV	VS - VISOR
	LINE2 -LN5353 (24.5")	CRI90	30 3000K	ME - 30°		AP ADJUSTABLE	0-10 V	
	LINE3 -LN5354 (36.7")		40 4000K	WI - 48°				
	LINE4 -LN5355 (49.06")			EW - 60° EL - 18 x 38° WW- 24 x 32°				



Imported by the Lighting Group Network (LGN).

<https://www.lightinggroupnetwork.com>

Lighting Group Network is the premier importer of European lighting products. We specialize in tailoring products from around the world to make them compliant with every North American market. From component sourcing, to full listings, Lighting Group Network has the engineering background to bring any manufacturer or product to full local compliance.

IP68 NOT SUITABLE FOR UNDERWATER USE.

2 YEAR WARRANTY.