



Project Name:	Type:
Product Code:	Date:



SPOT WALL LARGE

THE VANILLA SPOT WALL is an extremely compact LED luminaire capable of enhancing outdoor ambiances with discretion and elegance through the creation of refined accent lighting effects. Its external power supply unit allows a comfortable installation even in the smallest spaces, as well as the simultaneous management of multiple units. It is the ideal solution for a bright illumination of essential landscape or architectural details in delicate pastel tones or intense white shades. Extremely compact LED luminaire for a bright illumination of essential landscape or architectural details (IP 67).



PERFORMANCE

	STATIC WHITE		DYNAMIC WHITE		RGBW
LUMEN PERF:	1499 LMS	251 LMS (Ultra Spot 6°)	413 LMS		242 LMS
POWER:	350 mA	1000 mA (US)	24v		24v
WATTAGE:	12.5 W	3 W (US)	9 W		9 W
CCT:	2700K	3000K	4000K	3000K — 6500K	

ALL


RATING:	IP 67	CONTROL SYSTEM:	DMX-RDM, ELV, ON-OFF, 0-10V
SOURCE:	LED MODULE	OPERATING TEMP:	-40°C to 50°C / (-40°F to 122°F)
SDCM:	2 STEP	MAX OUTPUT:	1499 lm / 120 lm/W
CRI:	80 CRI, 90 CRI Optional	RATING	IP 67 WET LOCATION

DIMENSIONS

SPOT STANDARD	SPOT SPIKE

DIMENSIONS

SPOT CUSTOM ROD

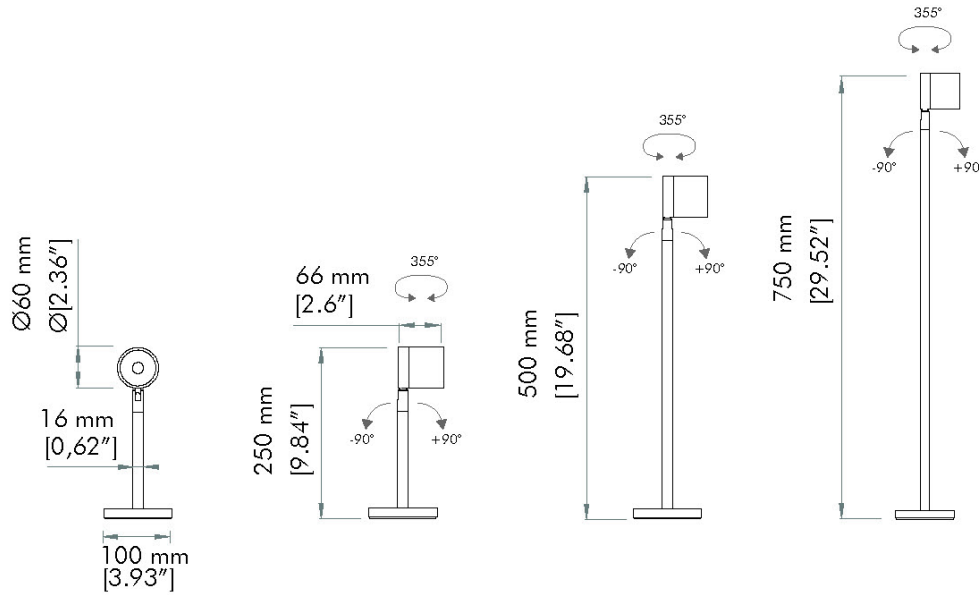

ORDER INFORMATION

Order Code

VAN	PROFILE	COLOR TEMP	OPTICS	FINISH	DIMMING	ACCESORY	
VAN	SP5312	27K 2700K	US 6° 3W 1000mA	BO Black RAL	ELV 0-10V others*	A Anti-Saline Treatment	
		30K 3000K	NA 18°	AO Anthracite RAL		S Spike for Ground Fixing	
		40K 4000K	ME 25°	GO Grey RAL		H Hexcell Louver	
				WI 35°	WO White RAL		R Custom ROD length
				EW 50°	OO Olive RAL		
				DW 3000-6500K	NA 13°	DMX - Requires a 24vdc Driver	
				RGBW3 3000K	ME 23°		
				RGBW4 4000K	WI 35°		
					EW 56°		

* On Request

FINISHING



WIRING DIAGRAM


STATIC WHITE

Constant Current - Wiring in Series
Maximum 1 Fixtures
Distance between PSU and the last fixture:
70FT AWG#12




STATIC WHITE (ULTRA SPOT)

Constant Current - Wiring in Series
Maximum 15 Fixtures
Distance between PSU and the last fixture:
70FT AWG#12

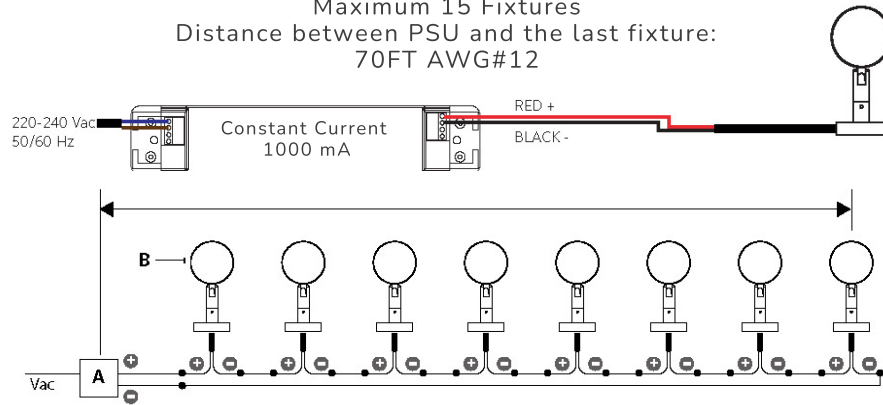

RGBW / DYNAMIC WHITE

Constant Voltage - Wiring in Parallel
Maximum 10 Fixtures
Distance between PSU and the last fixture:
100FT AWG#12

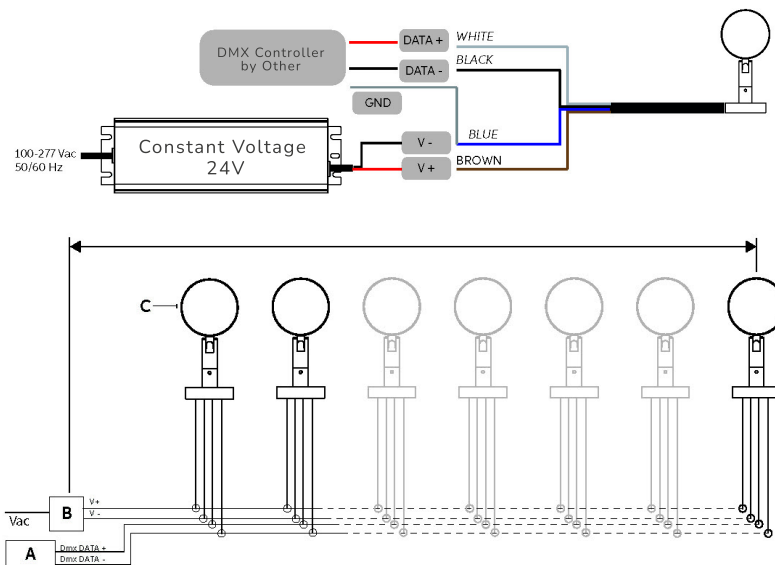

IP67 SUITABLE FOR DRY/WET LOCATION. NOT SUITABLE FOR UNDERWATER USE
5 YEAR WARRANTY.