


INGROUND UPLIGHT SMALL



Project Name:	Type:
Product Code:	Date:

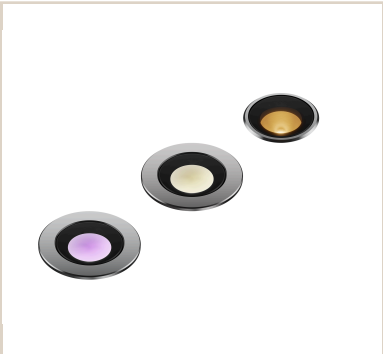

Inground Uplight Small

The perfect solution for marking out paths, walkways, and entrances, and illumination of small architectural or landscape elements. Featuring a shallow recess depth for a hassle-free installation, this series is available in every desired colored or white shade. Fitted with stainless steel frame and remote PSU, these versatile uplights also come in a flush-mount full-glass version for an even more elegant and discreet layout. A durable drive-over version is suitable for installation in vehicular areas.



PERFORMANCE

	STATIC WHITE			DYNAMIC WHITE		RGBW
LUMEN PERF:	229 LMS			24 LMS		14 LMS
POWER:	700 mA			150 mA		150 mA
WATTAGE:	2.5W			1.5W		1.5W
CCT:	2700K	3000K	4000K	3000K — 6500K		

ALL			
RATING:	IP 68	CONTROL SYSTEM:	DMX-RDM, ELV, ON-OFF, 0-10V
SOURCE:	LED MODULE	RANGE:	1-100% Dimming Range
SDCM:	2 STEP	MAX OUTPUT:	229 LM / 92 Lm/W
CRI:	80 CRI, 90 CRI Options Available upon request	OPERATING TEMP:	-40°C to 40°C / (-40°F to 104°F)

DIMENSIONS

TRIMLESS	TRIMMED



ORDER INFORMATION


Order Code

VAN	PROFILE	COLOR TEMP		OPTICS		TRIM	POWER	OPTIONS
VAN	IN5317 Fixed	27K	2700K	NA	12°	TL Trimless	ELV	H HEXCELL LOUVER
		30K	3000K	ME	23°	TR Trimmed	0-10V	
		40K	4000K	WI	43°			
		RGBW3	3000K	GO	120°		DMX DMX-RDM* (DMX Ready)	
		RGBW4	4000K					
		DW	3000-6500K					

\*250 mA driver required for Static White options.

\*\* Other dimming options available upon request


HOUSING DIMENSIONS

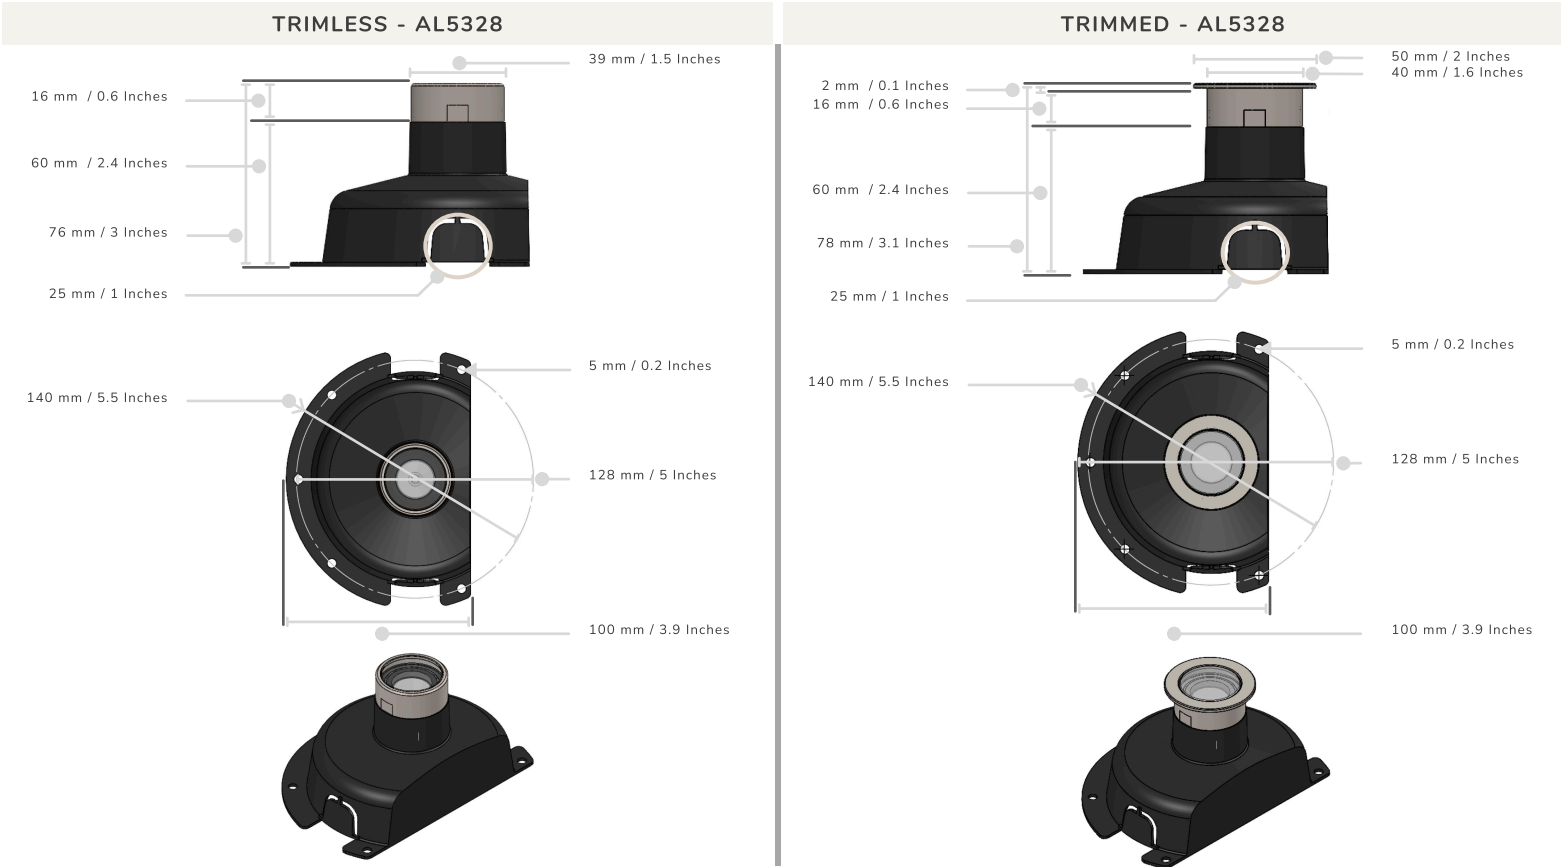

## WIRING DIAGRAM

### STATIC WHITE

Constant Current - Wiring in Series  
Maximum 10 Fixture  
Distance between PSU and the last Fixture:  
164FT AWG#12

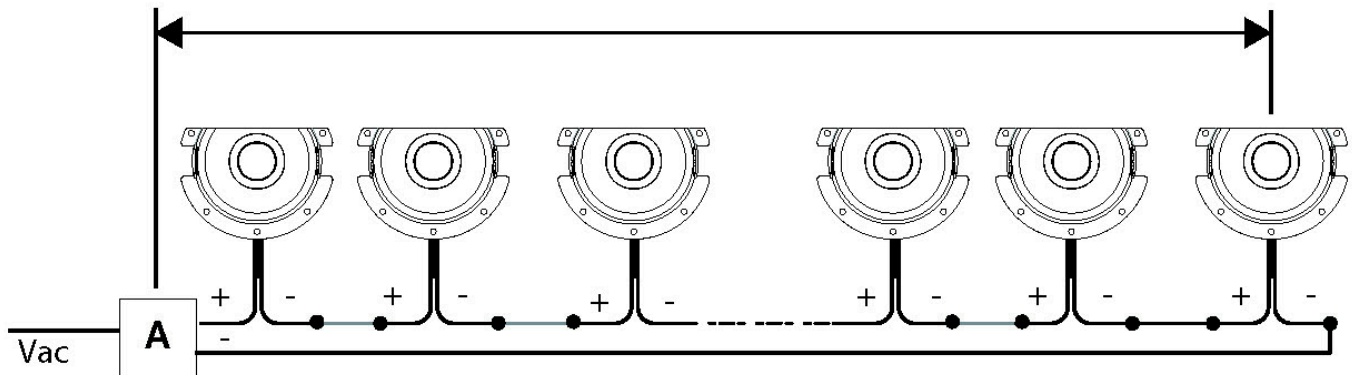

### DYNAMIC WHITE + RGBW

Constant Voltage - Wiring in Parallel  
Maximum 4 Fixtures  
Distance between PSU and the last fixture:  
328FT AWG#12

