


Project Name:	Type:
Product Code:	Date:



SPOT SURFACE LARGE

THE VANILLA SPOT SURFACE is an extremely compact LED luminaire capable of enhancing outdoor ambiances with discretion and elegance through the creation of refined accent lighting effects. Its external power supply unit allows a comfortable installation even in the smallest spaces, as well as the simultaneous management of multiple units. It is the ideal solution for a bright illumination of essential landscape or architectural details in delicate pastel tones or intense white shades. Extremely compact LED luminaire for a bright illumination of essential landscape or architectural details (IP 67).

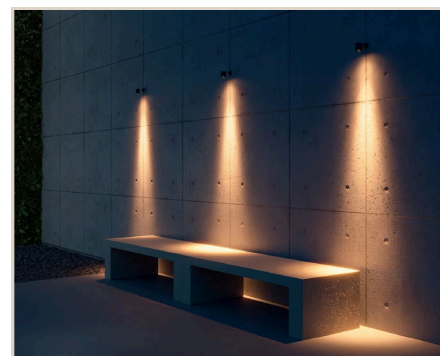


PERFORMANCE


	STATIC WHITE		DYNAMIC WHITE		RGBW
LUMEN PERF:	1499 LMS	251 LMS (Ultra Spot 6°)	413 LMS		242 LMS
POWER:	350 mA	1000 mA (US)	24v		24v
WATTAGE:	12.5 W	3 W (US)	9 W		9 W
CCT:	2700K	3000K	4000K	3000K — 6500K	
ALL					
RATING:	IP 67		CONTROL SYSTEM:	DMX-RDM, ELV, ON-OFF, 0-10V	
SOURCE:	LED MODULE		OPERATING TEMP:	-40°C to 50°C / (-40°F to 122°F)	
SDCM:	2 STEP		MAX OUTPUT:	1499 lm / 120 lm/W	
CRI:	80 CRI, 90 CRI Optional		RATING	IP 67 WET LOCATION	

DIMENSIONS

SPOT STANDARD - SURFACE MOUNTED

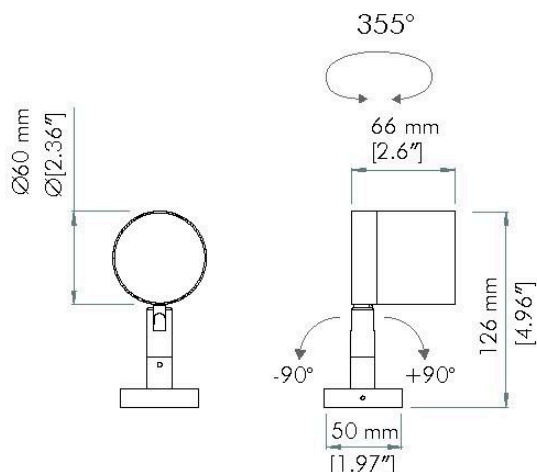


SPOT SPIKE

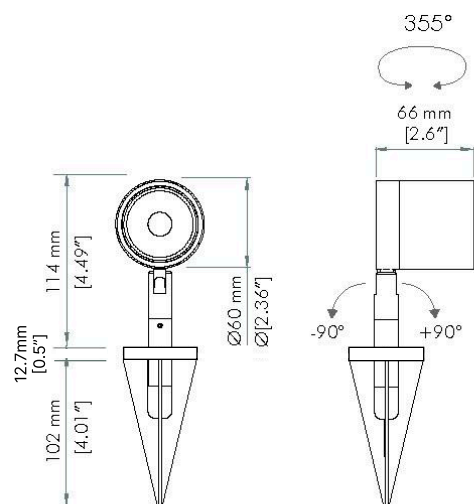


DIMENSIONS

SPOT BOLLARD

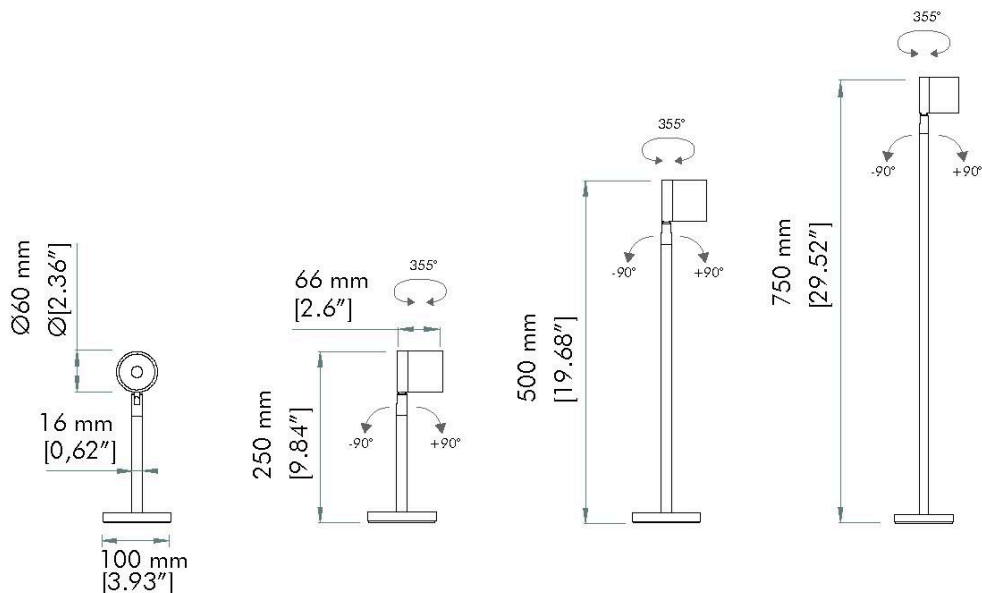

3 WAY JUNCTION BOX IP67 - VAN5296

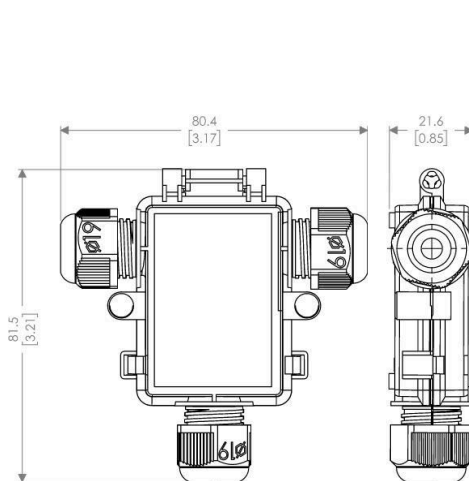

ORDER INFORMATION

Order Code

VAN	PROFILE	COLOR TEMP		OPTICS		FINISH		DIMMING	ACCESORY
VAN	SP5312	27K	2700K	US	6° 3W 1000mA	BO	Black RAL	ELV	A Anti-Saline Treatment
		30K	3000K	NA	18°	AO	Anthracite RAL	0-10V	S Spike for Ground Fixing
		40K	4000K	ME	25°	GO	Grey RAL	others*	H Hexcell Louver
				WI	35°	WO	White RAL		B Custom BOLLARD length
				EW	50°	OO	Olive RAL		V Visor (VAN5333)
									SN Snoot (VAN5322)
									3W 3 Way Junction Box IP 67 (VAN5296)
		DW	3000-6500K	NA	13°			DMX - Requires a 24vdc Driver	
		RGBW3	3000K	ME	23°				
		RGBW4	4000K	WI	35°				
				EW	56°				

* On Request

FINISHING



BLACK RAL



ANTHRACITE RAL



GREY RAL




WHITE RAL




OLIVE RAL

WIRING DIAGRAM

STATIC WHITE

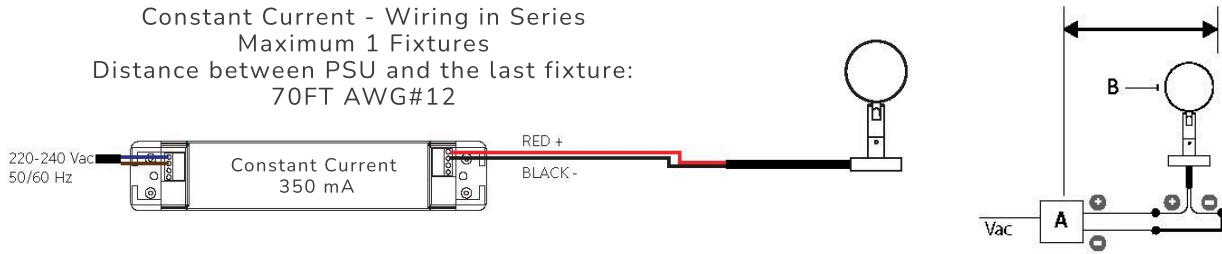

STATIC WHITE (ULTRA SPOT)

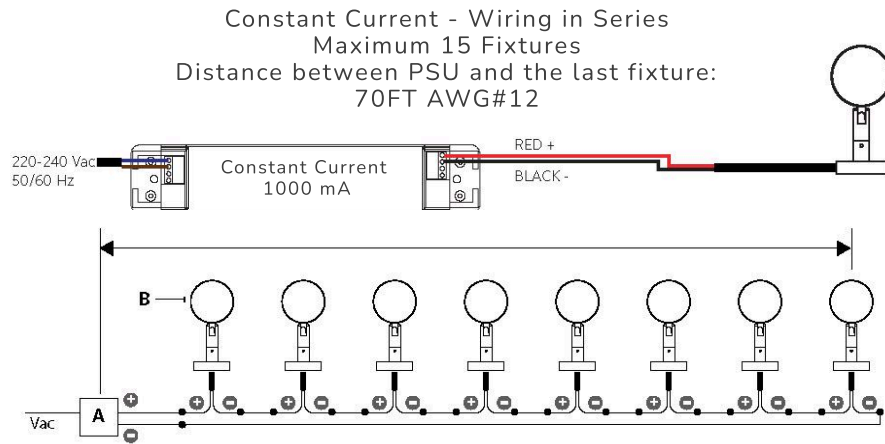

RGBW / DYNAMIC WHITE

