

Project Name: Type: **Product Code:** Date:

# INGROUND UPLIGHT SMALL @





#### Inground Uplight Small

The perfect solution for marking out paths, walkways, and entrances, and illumination of small architectural or landscape elements. Featuring a shallow recess depth for a hassle-free installation, this series is available in every desired colored or white shade. Fitted with stainless steel frame and remote PSU, these versatile uplights also come in a flush-mount full-glass version for an even more elegant and discreet layout. A durable drive-over version is suitable for installation in vehicular areas.




#### **PERFORMANCE**

	STATIC WHITE	DYNAMIC WHITE	RGBW
LUMEN PERF:	229 LMS	24 LMS	14 LMS
POWER:	700 mA	150 mA	150 mA
WATTAGE:	2.5W	1.5W	1.5W
ССТ:	2700K 3000K 4000K	3000K — 6500K	

ALL							
RATING:	IP 68	CONTROL SYSTEM:	DMX-RDM, ELV, ON-OFF, 0-10V				
SOURCE:	LED MODULE	RANGE:	1-100% Dimming Range				
SDCM:	2 STEP	MAX OUTPUT:	229 LM / 92 Lm/W				
CRI:	80 CRI, 90 CRI Options Available upon request	OPERATING TEMP:	-40°C to 40°C / (-40°F to 104°F)				

### **DIMENSIONS**

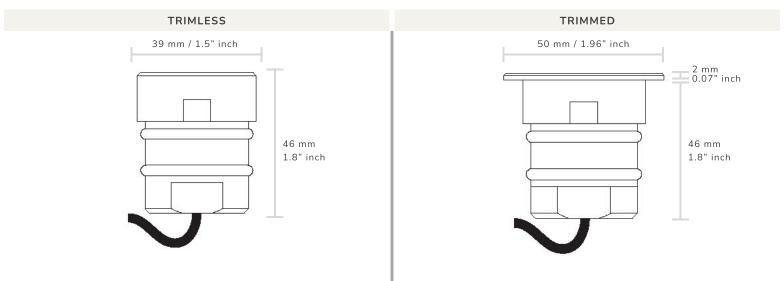

## INGROUND UPLIGHT SMALL




## **ORDER INFORMATION**

Order (	Code					
VAN	PROFILE	COLOR TEMP	OPTICS	TRIM	POWER	OPTIONS
VAN	IN5317 Fixed	27K 2700K 30K 3000K 40K 4000K  RGBW3 3000K RGBW4 4000K DW 3000-6500K	NA 12°  ME 23°  WI 43°	<b>TL</b> Trimless <b>TR</b> Trimmed	ELV 0-10V  DMX DMX-RDM* (DMX Ready)	H HEXCELL LOUVER

<sup>\*250</sup> mA driver required for Static White options.

## HOUSING DIMENSIONS

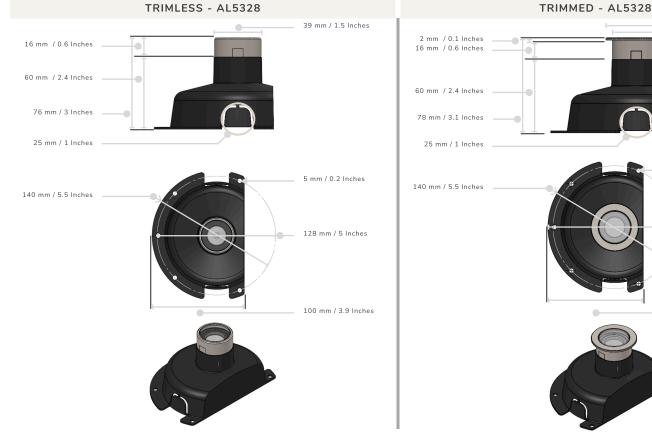

50 mm / 2 Inches 40 mm / 1.6 Inches

5 mm / 0.2 Inches

128 mm / 5 Inches

100 mm / 3.9 Inches

<sup>\*\*</sup> Other dimming options available upon request


## INGROUND UPLIGHT SMALL



#### WIRING DIAGRAM


#### STATIC WHITE

Constant Current - Wiring in Series
Maximum 10 Fixture
Distance between PSU and the last Fixture:
164FT AWG#12

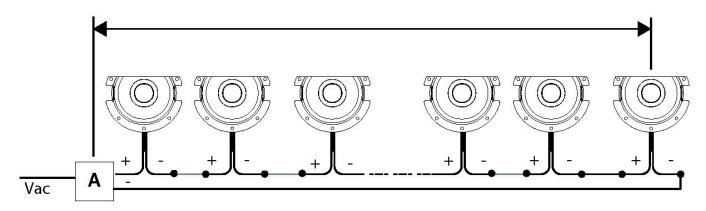

#### DYNAMIC WHITE + RGBW

Constant Current 150mA - Wiring in Series
Maximum 10 Fixtures
Distance between PSU and the last fixture:
328FT AWG#12

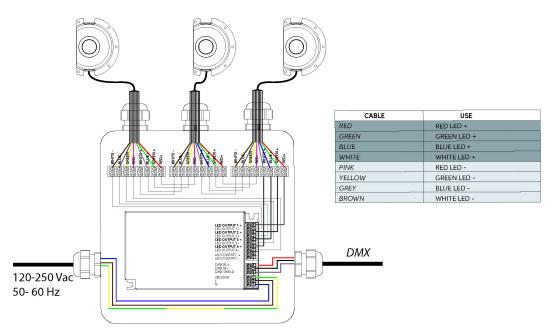



Imported by the Lighting Group Network (LGN).

https://www.lightinggroupnetwork.com

Lighting Group Network is the premier importer of European lighting products. We specialize in tailoring products from around the world to make them compliant with every North American market. From component sourcing, to full listings, Lighting Group Network has the engineering background to bring any manufacturer or product to full local compliance.

IP68 NOT SUITABLE FOR UNDERWATER USE

2 YEAR WARRANTY.