

Project Name:	Type:
Product Code:	Date:

## BRASS ADJUSTABLE CYLINDER



### BRASS ADJUSTABLE CYLINDER

The Vanilla Brass Adjustable Cylinder features a clean machined body which showcases the quality of its craftsmanship. The cylinder provides high visual comfort thanks to the deep inch regress of the LED-engine. This helps to control glare and maintain a quiet elegance in any space or setting it's installed. The fixture has a brass swivel stem for optimal adjustability, this allows the fixture to be tilt able 90° and Rotated 359°.


The Vanilla Brass Adjustable Cylinder is provided with a 4 inch stem standard. The fixture is mounted to a minimal backplate 2.5 inches in diameter. Optics and LED Engines are field swappable between the (20°) (26°) (36°) and 2700K, 3000K, and Warm Dim. It also features a clean beam edge suitable for lighting high quality residential and hospitality spaces.



## PERFORMANCE


	STATIC WHITE LED	WARM DIM LED
CCT:	2700K / 3000K	1800K - 3000K
CRI:	98 CRI	95 CRI
WATTAGE:	13 WATTS (350 mA)	13 WATTS (350 mA)
LUMENS:	1050 lm	1010 lm
LED LIFE:	50,000 hours	50,000 hours
R9:	97	85
SDCM:	3 STEP	3 STEP
CCT:	2700K    3000K	1800K - 3000K

### OPTICS / BEAM SPREAD:

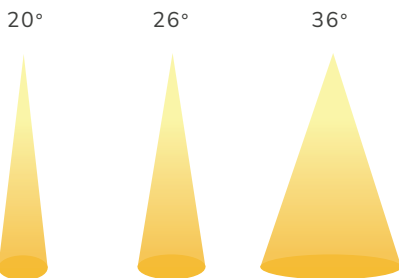

\*optics are field swappable

## KEY DIMENSIONS

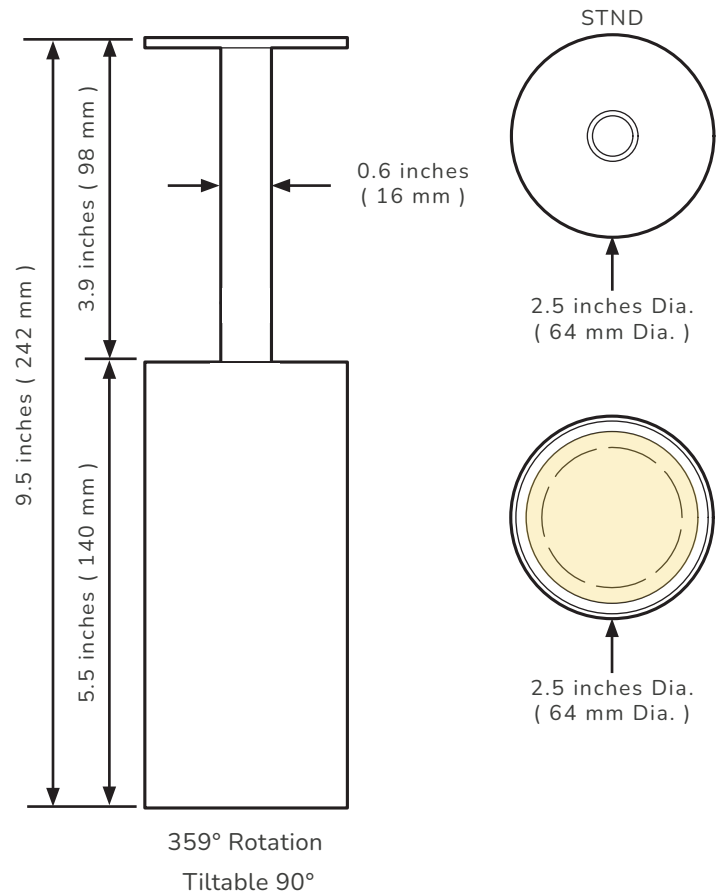

## FINISHES



**POLISHED BRASS**



**ANTIQUED BRASS**



**BLACKENED BRASS**

## ORDER INFORMATION

### ORDER CODE BODY

MAKE	PROFILE	FINISHES	OPTICS	COLOR TEMP	DRIVER	INSTALLATION
VAN	BRPM	<b>PB</b> Polished Brass	<b>S</b> 20°	<b>27K</b> 2700K	<b>E10</b> ELV & 0-10	<b>STND</b> Surface Mounted with Screws
		<b>AB</b> Antiqued Brass	<b>NF</b> 26°	<b>30K</b> 3000K	<b>X</b> Other	<b>MDKIT</b> Drywall cover for J-BOX
		<b>BB</b> Blackened Brass	<b>FL</b> 36°	<b>WD</b> 1800K-3000K		


## DRIVER INFORMATION

Remote Driver up to 70ft away - AWG #12



W : 1.7" H : 0.79" L : 6.26"

Length: 6.6" (16.8cm) Width: 1.9" (4.8cm) Height: 1.25" (3.175cm)

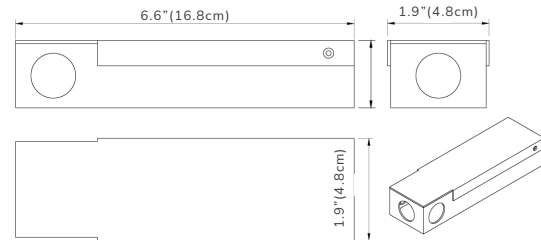

The Driver is recommended to be mounted in at least 2" of free flow air space to allow for proper ventilation.