VANILLA
LIGHT CREATING SPACE

Project Name:	Type:
Product Code:	Date:

INGROUND UPLIGHT SMALL



Inground Uplight Small

The perfect solution for marking out paths, walkways, and entrances, and illumination of small architectural or landscape elements. Featuring a shallow recess depth for a hassle-free installation, this series is available in every desired colored or white shade. Fitted with stainless steel frame and remote PSU, these versatile uplights also come in a flush-mount full-glass version for an even more elegant and discreet layout. A durable drive-over version is suitable for installation in vehicular areas.




PERFORMANCE

	STATIC WHITE	DYNAMIC WHITE	RGBW
LUMEN PERF:	229 LMS	24 LMS	14 LMS
POWER:	700 mA	150 mA	150 mA
WATTAGE:	2.5W	1.5W	1.5W
CCT:	2700K 3000K 4000K	3000K — 6500K	


ALL			
RATING:	IP 68	CONTROL SYSTEM:	DMX-RDM, ELV, ON-OFF, 0-10V
SOURCE:	LED MODULE	RANGE:	1-100% Dimming Range
SDCM:	2 STEP	MAX OUTPUT:	229 LM / 92 Lm/W
CRI:	80 CRI, 90 CRI Options Available upon request	OPERATING TEMP:	-40°C to 40°C / (-40°F to 104°F)

DIMENSIONS

TRIMLESS

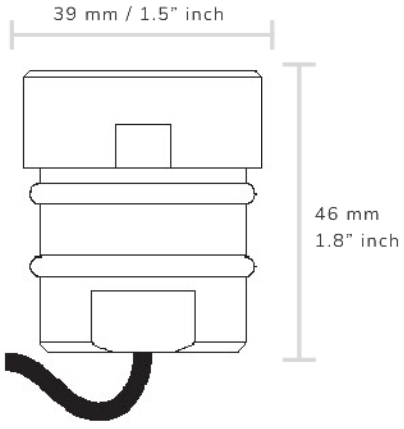

TRIMMED

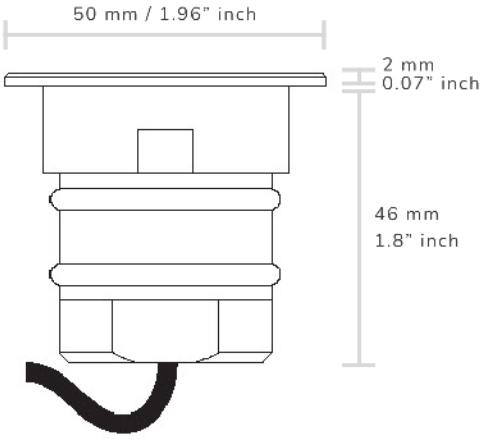

ORDER INFORMATION

Order Code


VAN	PROFILE	COLOR TEMP	OPTICS	TRIM	POWER	OPTIONS
VAN	**IN5317** Fixed	**27K** 2700K **30K** 3000K **40K** 4000K	**NA** 12° **ME** 23° **WI** 43°	**TL** Trimless **TR** Trimmed	**ELV** **0-10V**	**H** HEXCELL LOUVER
		RGBW3 3000K **RGBW4** 4000K **DW** 3000-6500K	**GO** 120°		**DMX** DMX-RDM* (DMX Ready)	

*250 mA driver required for Static White options.


** Other dimming options available upon request

HOUSING DIMENSIONS

TRIMLESS - AL5328

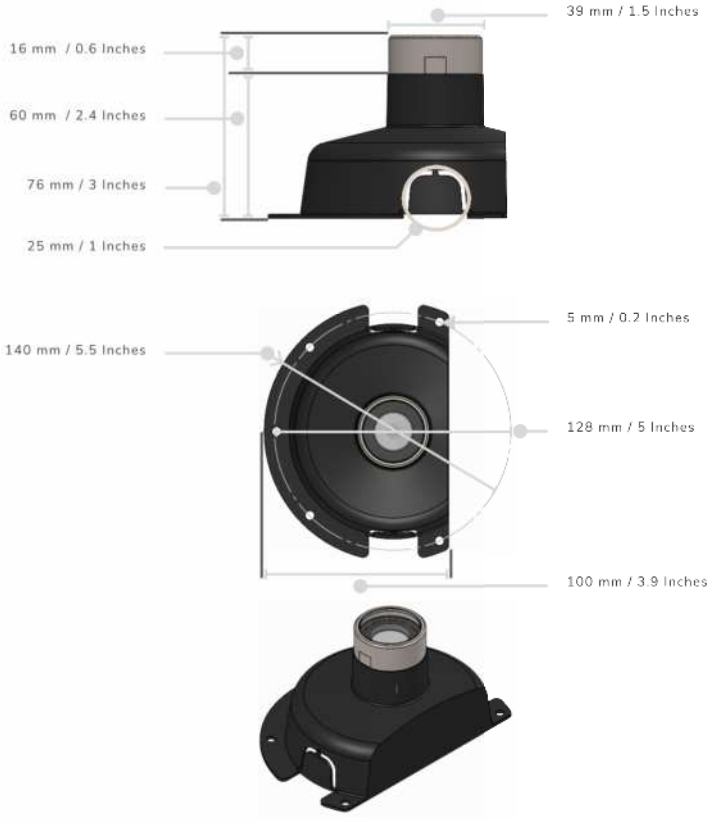


TRIMMED - AL5328

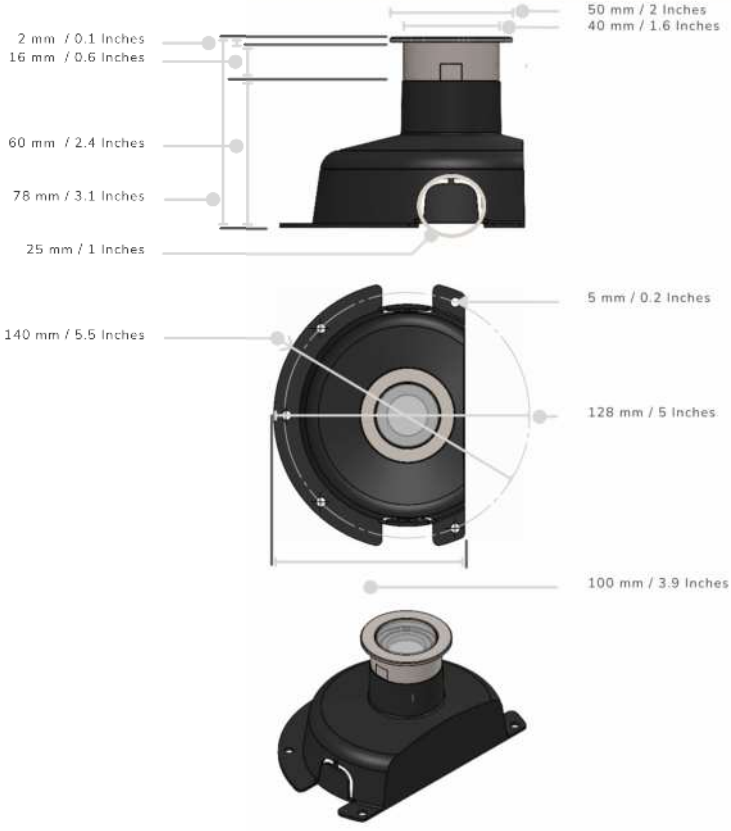

WIRING DIAGRAM


STATIC WHITE

Constant Current - Wiring in Series
Maximum 10 Fixture
Distance between PSU and the last Fixture:
164FT AWG#12

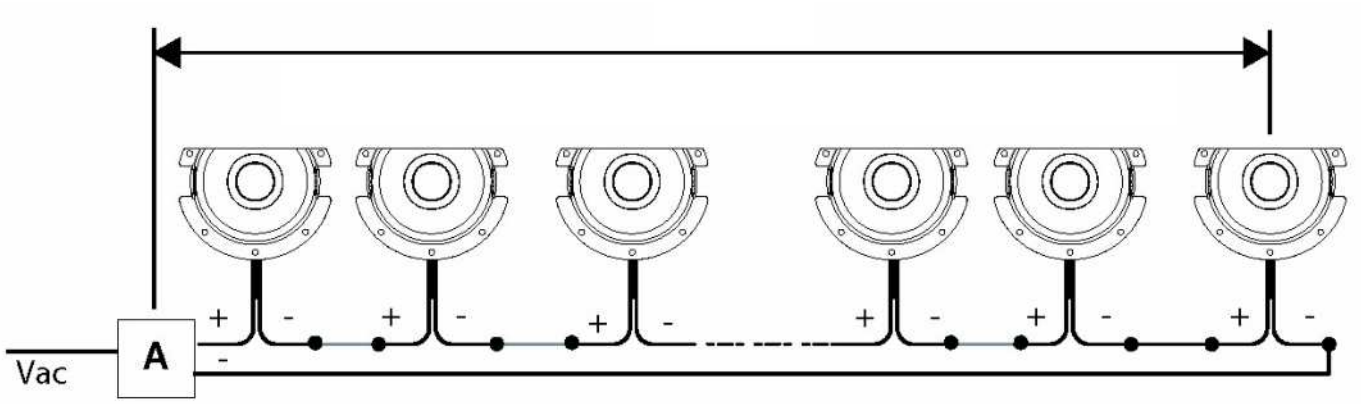

DYNAMIC WHITE + RGBW

Constant Current 150mA - Wiring in Series
Maximum 10 Fixtures
Distance between PSU and the last fixture:
328FT AWG#12

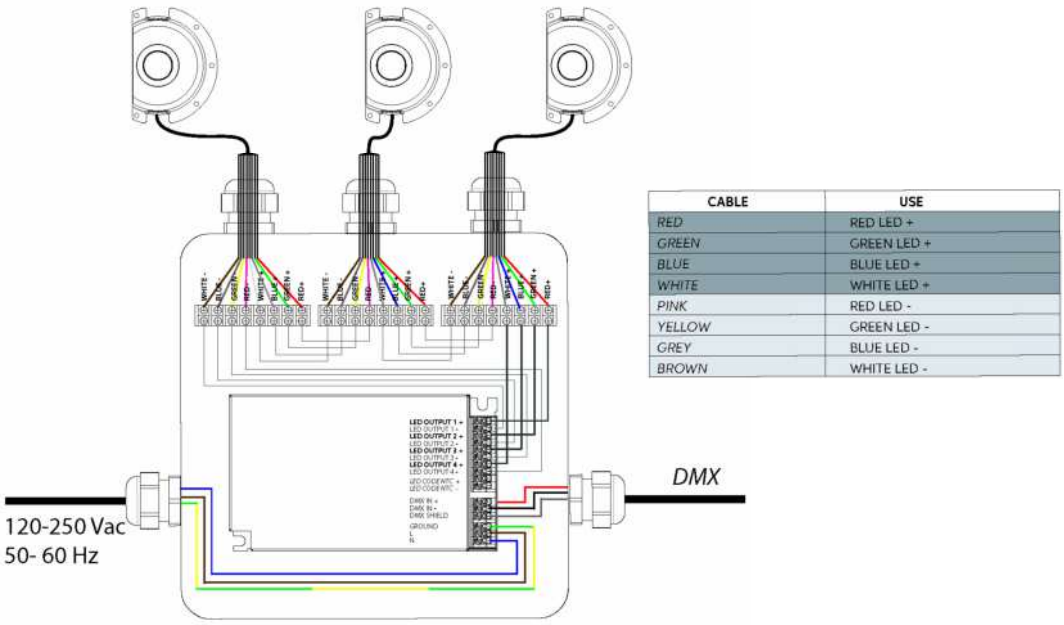

CABLE	USE
RED	RED LED +
GREEN	GREEN LED +
BLUE	BLUE LED +
WHITE	WHITE LED +
PINK	RED LED -
YELLOW	GREEN LED -
GREY	BLUE LED -
BROWN	WHITE LED -