VANiiiA
LIGHT CREATING SPACE

VANILLA 1616 PROFILE

ETL Intertek · cULus LISTED E497000 · TÜV Rheinland CERTIFIED · UKCA · CE · RoHS compliant

1616 PROFILE

The Vanilla 1616 Profile is a curved 16mm x 16mm (0.62"x0.62") channel that facilitates our 6mm (0.24") to the 10mm (0.39") LED tape. The LED tape is Eco design certified and due to this opereates for longer with better energy efficiency. The profile and tape come together to create a modern and sleek look for any interior application.
IP20
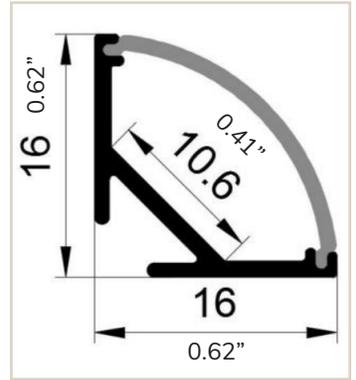
PERFORMANCE

MATERIAL:	ALUMINIUM
LENGTH:	8 FEET
RATING:	IP20 - DRY LOCATION
FINISH:	ALUMINIUM
LENS:	OPAL DOT FREE
VOLTAGE:	24V
CRI:	90+

KEY DIMENSIONS

LED PERFORMANCE

POWER	LUMENS	CCT
3.7W/ft (12W/M)	500 Lm/ft 1650Lm/M	2400K/2700K/3000K
4.4W/ft (14.4W/M)	750 Lm/ft 2450Lm/M	2400K/2700K/3000K
5.5W/ft (18W/M)	930 Lm/ft 3050Lm/M	2400K/2700K/3000K
5.5W/ft (18W/M)	400 Lm/ft 1320Lm/M	1800K-3000K

*OPAL LENS Light transmittance 70-80%

LED TAPE DIMENSIONS

3.7W/ft (12W/M) 0.24" (6mm)

4.4W/ft (14.4W/M) 0.31" (8mm)

5.5W/ft (18W/M) 0.31" (8mm)
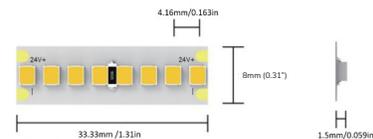
5.5W/ft (18W/M) 0.4" (10mm)
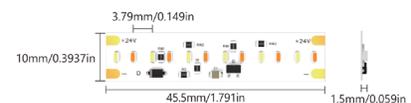
ORDER INFORMATION

Order Code

MAKE	PROFILE	FINISHES		LENGTH	LENS		ACCESSORIES	
VAN	LPR-1616	AL	Aluminium	8'*	OP	Opal	EC	End Cap
				XX**			CLP	Clip

*8FT BULK-ORDER FIELD CUTTABLE
**PREASSEMBLED ON REQUEST

COMPATIBLE LED TAPE

Order Code

MAKE	TAPE	CCT
VAN	LPRT-3.7W	2400K
	LPRT-4.4W	2700K
	LPRT-5.5W	3000K
	LPRT-5.5W	1800K-3000K

LGN LIGHTING GROUP NETWORK

Imported by the Lighting Group Network (LGN).

https://www.lightinggroupnetwork.com

Lighting Group Network is the premier importer of European lighting products. We specialize in tailoring products from around the world to make them compliant with every North American market. From component sourcing, to full listings, Lighting Group Network has the engineering background to bring any manufacturer or product to full local compliance.

IP20
FOR INTERIOR USE ONLY.

Vanilla Lighting
Imported by the Lighting Group Network, LLC   Page 01/01   Updated 11/25/24